


FONTAINE INFINITY FORKLIFT HAULER



When you come to a forklift in the road ... **haul it!**

This **factory built** solution is extremely durable and handles **multiple forklift brands** with ease.

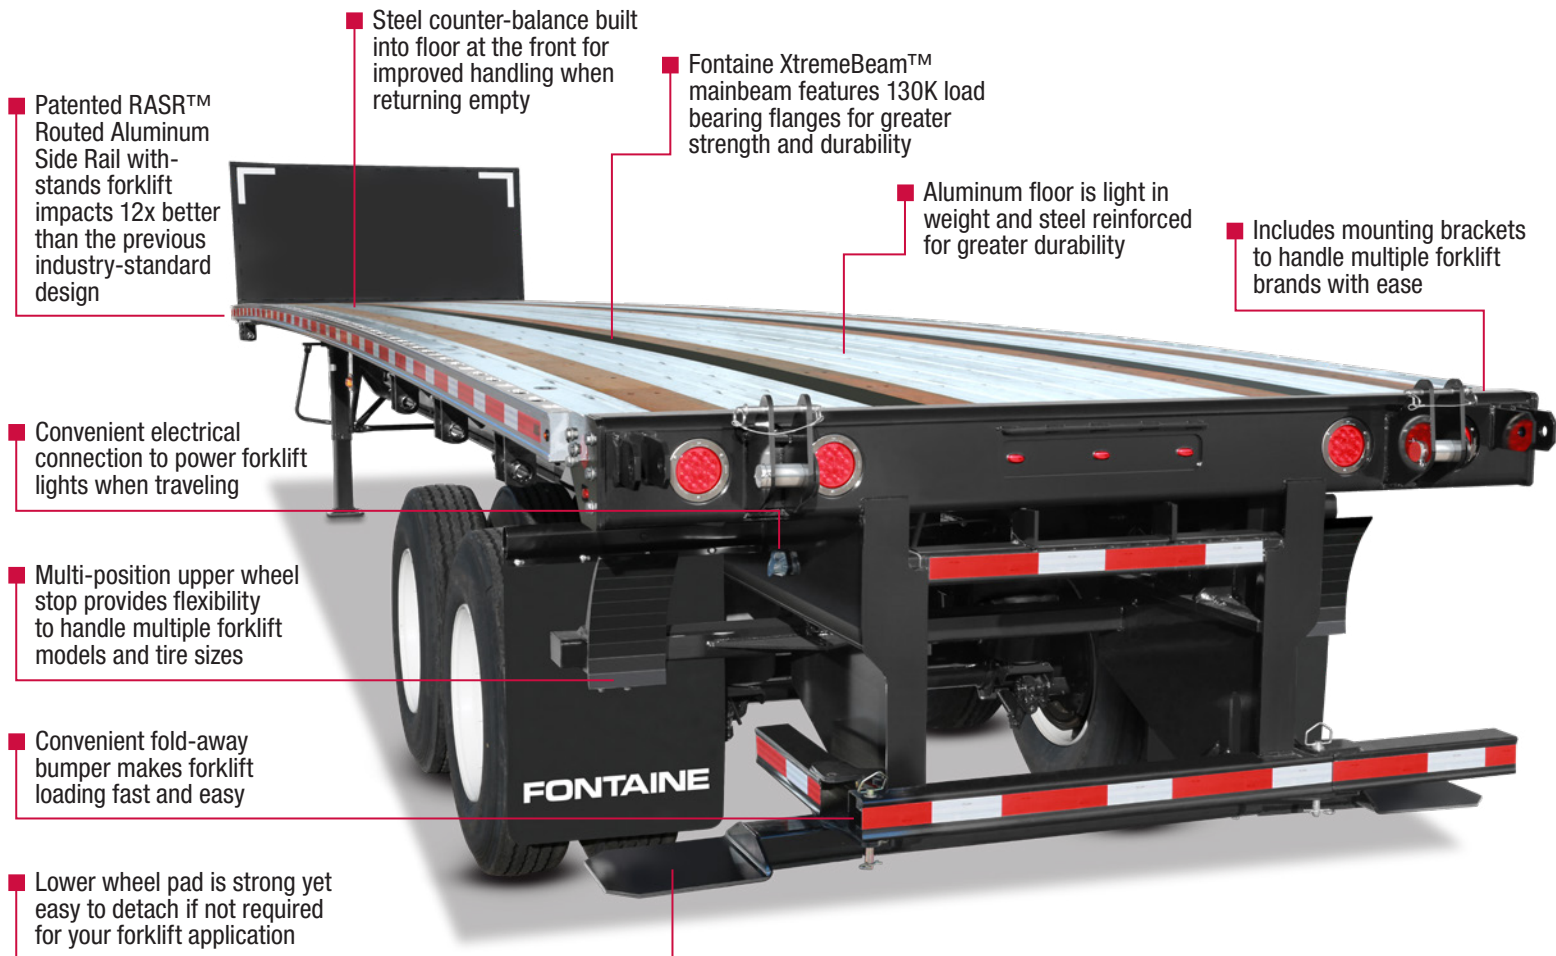

Not an aftermarket add-on kit!

Designed, engineered and factory manufactured by Fontaine, the industry leader.



www.fontainetrailer.com/forklift


Visit your local Fontaine
Trailer Dealer today!

See our forklift hauling solutions at
fontainetrailer.com/forklift



Fontaine Commercial Platform • 430 Letson Road • Haleyville, Alabama 35565 • 800-821-6535

NEW Fontaine Infinity Forklift Hauler Specifications

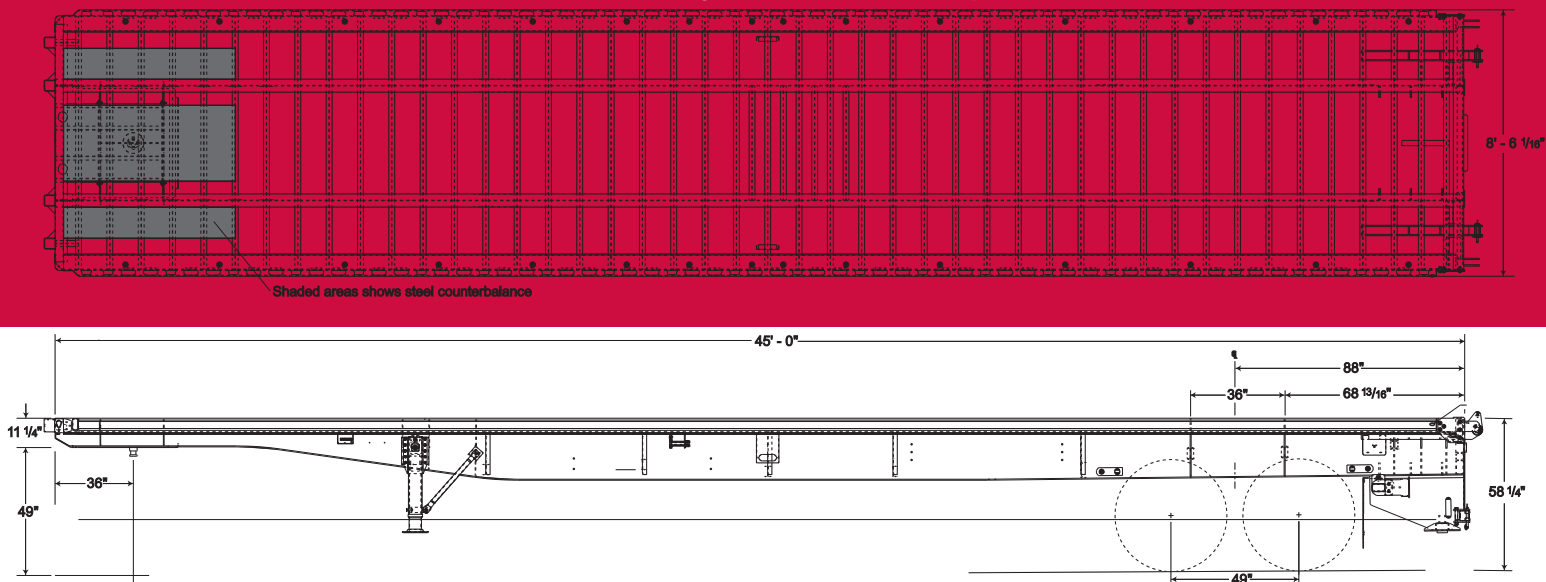

Overall Length x Width: 45' x 102"

Suspension: Sliding air tandem set in a fixed location

Frame Rating: 80,000 lbs distributed—GAWR and tire ratings determine legal payloads

Flooring: 1 1/8" aluminum with 4 apitong wood nailer strips

Crossmembers: 12" centers — 4" jr. I-steel

Coil Package: Single coil hauling package included

Side Rails: Exclusive Revolutionary RASR siderail technology—one piece routed aluminum designed for exceptional strength and impact resistance

Chain Cargo Tie Downs: available as an option

Stake Pockets: Routed aluminum on 24-inch centers (Two load securement openings between stake pockets)

Rubrail: Integrated with siderail

Main Beams: 130K load bearing flanges

Kingpin: Set at 30" with 49" loaded fifth wheel height

Landing Gear: OEM STANDARD

Knee Braces: Fabricated on approximately 60" centers

Bulkhead Pockets: Four steel DOT-type, welded to front

Optional Bulkhead: Steel DOT-type, 4-Post, no turnback, 48" high, approx 330 lbs, available as an option

Axles: 2 Axles with 49" spread

Axle Spindle: Tapered

Brakes: Spring brakes, auto slacks

Air Line Filters: Two Meritor In-line type installed

ABS: 4S/2M no cable or tool

Hub and Drums: 10-hole, hub-piloted, outboard cast drums (hubodometer available as an option)

Wheel Ends: Grease in hubs; 5-year wheel end warranty

Wheels: 22.5 x 8.25 steel disc pre-painted white (optional aluminum wheels available)

Tires: 295/75R 22.5 14PR — OEM STANDARD (inflation system and spare tire carrier available as options)

Suspension Detail: Closed Tandem Air Ride—Fixed, Hendrickson AANT23K Intraxx

Auto Glad Hand Dump: Installed

Front Corners: Tapered steel

Electrical System: LED sealed system: 3 lights/side, 2 lights/side on rear — STANDARD

Paint: Black urethane on steel parts with Infinity decals—STANDARD

Conspicuity Tape: Per NHTSA specs — installed in recess on rubrails

Bumper: Weld-on type — meets underride requirements, painted steel

Mudflaps: One set OEM STANDARD

Winch Track: Full length integrated double L type aluminum on both sides — STANDARD

Sliding Winches: 12: 6 each side; sliding rope hook/ winch strap hook retainers — STANDARD (27' and 30' winch straps available as an option)


VIN Plate: Bilingual US/Canadian VIN plate

Rear Forklift Design: Factory installed Fontaine "Universal" forklift system accepts Moffett, Princeton and Navigator brand forklifts; Dealer and Customer responsible for final adjustment of wheel stops and additional mounting hardware (if needed) to accommodate the specific forklift model being transported.

Counterweights: (One) 48" x 38.75" and (Two) 48" x 18.5" steel counterweights replace 4 ft of aluminum floor at front of trailer. Adds approx 1,112 lbs combined weight. Note that the optional bulkhead adds approx 330 lbs to the front of the trailer.

Registration Holder: OEM STANDARD installed

Tool boxes: Available as an option

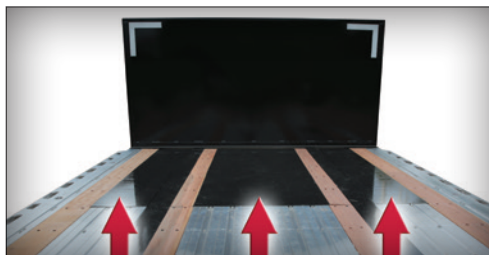

Steel counterweights are built into the front floor to balance the forklift weight when returning empty. For optimum performance make sure the counterbalance and 5th wheel spec are correct for your application.

Counterweight recommendations by forklift model

Model	Weight	Center of Gravity	Estimated Counterweight Requirements*
Moffett Semi Trailer Forklifts			
M4 36.1	3500	13	475
M4 36-3	3820	16	631
M4 45-3P	4420	11	822
M5 NX 50-3	5290	15.5	1224
M5 NX 50-3P	6140	14	1547
M5 NX 50-4	5990	15	1501
M5 NX 50-4P	6990	16	1923
M8 55.4	7120	17	1993
M8 55.3P	7720	22	2332
M8 55.4P	8670	22	2733
M8 55-3	6340	19	1704
M8 70-3	6170	17.5	1611
M8 80-4	8390	17.5	2524
M8 80-3	6610	19	1816
M9 55-3 LP	6625	17.5	1798
M9 60-3	7230	18	2056
Princeton Semi Trailer Forklifts			
PB36	3500	17	585
PB45 STM	4520	14.5	981
PB45	5290	15.5	1308
PB55+	6400	26.5	1935
PB55+4-way	7120	17	2087
PB55X+	7240	30	2364
PB70+	6700	27	2074
PB80+	6970	27	2193
Navigator Semi Trailer Forklifts			
RT- 4000	3900	18	3251
RT-5000	5100	18	3944
RT-5500	5800	25.5	4453
RT-6500	7090	25.5	5221

*Counterweight estimates are based on forklift OEM's recommendations for trailer 5th wheel weight distribution when unladen with forklift attached to trailer. Consult with forklift provider to verify proper counterbalance. Consult with truck OEM to verify proper 5th wheel specification.



See our forklift hauling solutions at
fontainetrailer.com/forklift



www.fontainetrailer.com/forklift

Fontaine Commercial Platform • 430 Letson Road • Haleyville, Alabama 35565 • 800-821-6535

Visit your local Fontaine Trailer Dealer today!